


One side coated board (WLC) grey back

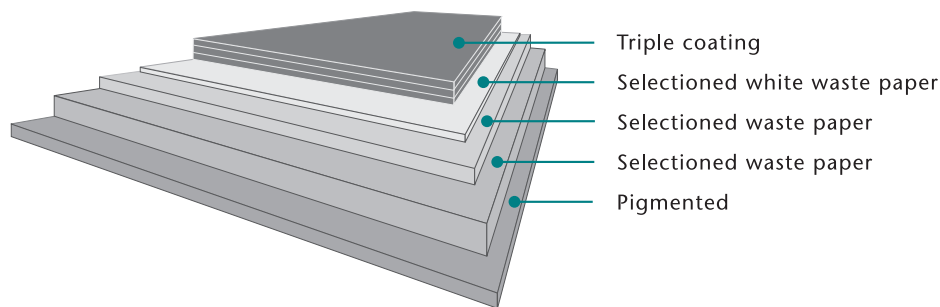

ISO 9001

Specifications for Triplex Gris:

Property / Unit	Tolerance												Standards
Grammage, g/m ²	±3%	250	275	300	325	350	375	400	425	450	475		ISO 536
Thickness, µm	±5%	350	385	420	460	495	535	570	605	640	680		ISO 534
Bending moment Taber 15° MD, mNm	-15%	8.0	10.8	13.5	17.0	20.0	24.6	29.6	35.1	41.6	47.0		ISO 2493
Bending moment Taber 15° CD, mNm	-15%	3.6	4.8	6.0	7.5	8.8	10.8	13.0	15.4	18.2	20.5		
ISO Brightness C/2°, Top		78-81	78-81	78-81	78-81	78-81	78-81	78-81	78-81	78-81	78-81		ISO 2470
Gloss 75°, %	±5°	50	50	50	50	50	50	50	50	50	50		
Bendtsen, Roughness, ml/min, Top		<100	<100	<100	<100	<100	<150	<150	<150	<150	<150		

All properties according to Barcelona Mill measurements.

Test climate 23°C/50% RH (According to ISO 187). Tolerances – based upon 95 % confidence limits, apply to reel/pallet average. In order to verify, reel/pallet average shall be based on 5 single measurements randomly sampled within the reel/pallet. These averages will be for at least 19 of 20 reels/pallets within the specification limits.

For more information contact your local sales office.

