


LumiLabel™ Light

One-side coated flexible packaging paper

LumiLabel Light is one-side-coated and very white flexible packaging paper.

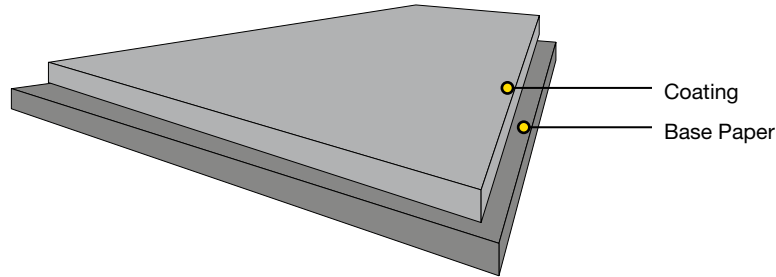

Issued: 03.2019
Cancels: 04.2018

Technical specification

Property / Unit	Tolerance					Standards
	±4%	45	50	55	60	
Grammage, g/m ²	±4%	45	50	55	60	ISO 536
Thickness, μm	±5	48	52	54	56	ISO 534
Brightness D65/10, %, CS	±3	89	91	92	93	ISO 2470-2
Tensile strength, kN/m, MD	±1.3	2.9	3.4	3.5	3.6	ISO 1924-3
Tearing resistance, mN, CD	±100	310	340	360	370	ISO 1974
Surface smoothness, PPS 10, μm, CS	±0.3	0.90	0.85	0.80	0.80	ISO 8791-4
Gloss 75°, %, CS	±3	50	55	59	61	ISO 8254-1
Opacity, %	±3	87	88	89	90	ISO 2471
Cobb 60, g/m ² , reverse	±6	25	25	25	25	ISO 535

OBA-containing for high brightness.



LumiLabel™ Light

One-side coated flexible packaging paper

Certificates

Quality management ISO 9001
Environmental management ISO 14001
Food Safety management ISO 22000
Health and safety OHSAS 18001
Energy management ISO 50001



The mark of responsible forestry



FSC and PEFC certified paper available upon request.



Paper is recyclable

Key characteristics and main enduses

LumiLabel Light is a sustainable packaging material used in multiple consumer packaging. LumiLabel Light is suitable for non-wet strength label applications, wrappers, bags and pouches, also as face-stock in pressure-sensitive labels. It is also used in applications with extrusion or adhesive lamination. LumiLabel Light is a flexible packaging paper with particularly high brightness suitable for rotogravure, flexographic or offset printing.

Storage recommendations

For optimal printing results, the moisture proof wrapping should not be removed until the paper has reached the temperature of the press room.

Pallet/Reel Weight (kg)	Difference in temperature between paper and press room (press room temp. approx. 20°C)		
	10°C	20°C	30°C
400 kg	2 days	2 days	3 days
800 kg	2 days	3 days	4 days
1200 kg	2 days	4 days	5 days

The product properties, according to the specifications, are guaranteed for 12 months after the production date. In order to ensure product safety, the product must be well wrapped and stored indoors, sheltered from rain and snow. The recommended storage conditions are 50-55% relative humidity and 20-23° C.

