


Unbleached liquid packaging board

Natura Life unbleached liquid packaging board with a three-layer fibre construction, with two outer layers made of unbleached sulphate pulp and a middle layer made of CTMP (chemi-thermomechanical pulp) and unbleached sulphate pulp and unbleached chemical pulp.

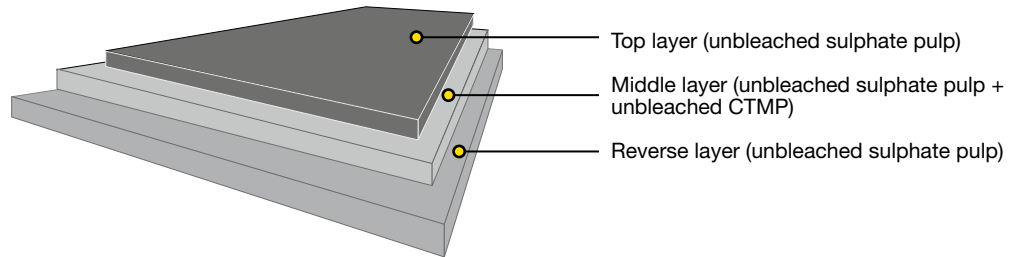

Issued: 05.2021
Cancels:

Specification from Skoghall Mill; Natura Life

Property / Unit			Standards
Grammage, g/m ²	260	285	ISO 536
Thickness, µm	475	530	ISO 534
Density, kg/m ³	547	538	
Bending resistance (L&W 15°) MD, mN	600	804	ISO 2493
Bending resistance (L&W 15°) CD, mN	216	287	
Bending resistance (L&W 15°) GM, mN	360	480	
Bending moment (Taber 15°) MD, mNm	29.0	38.8	
Bending moment (Taber 15°) CD, mNm	10.4	13.9	
Bending moment (Taber 15°) GM, mNm	17.4	23.2	
Moisture, %	6.5	6.5	ISO 287
Roughness (Bendtsen), ml/min, Top	500	500	ISO 8791-2
Packaging size suggestion, ml	1000	1500	

Unbleached liquid packaging board

Certificates

- Quality management ISO 9001
- Environmental management ISO 14001
- Product safety FSSC 22000
- Occupational health and safety ISO 45001
- Energy management ISO 50001



FSC and PEFC certified board available upon request.



Paperboard is recyclable

Key characteristics and main enduses

Natura Life offers the best in product protection, in printing, converting and filling performance, and in economy and sustainability. Like all Stora Enso liquid packaging board qualities, it has an exceptionally high standard of odour and taint neutrality, which makes it especially suitable for packaging sensitive food products and keeping them fresh and hygienic, unchanged and untainted for their entire lifetime. The product range serves a wide array of packaging applications, such as milk, yoghurt and juice.

Storage recommendations

For optimal printing results, the moisture proof wrapping should not be removed until the board has reached the temperature of the press room.

Pallet/Reel Weight (kg)	Difference in temperature between board and press room (press room temp, approx 20°C)		
	10°C	20°C	30°C
400 kg	2 days	2 days	3 days
800 kg	2 days	3 days	4 days
1200 kg	2 days	4 days	5 days

The product properties, according to the specifications, are guaranteed for 12 months after the production date. In order to ensure product safety, the product must be well wrapped and stored indoors, sheltered from rain and snow. The recommended storage conditions are 50-55% relative humidity and 20-23°C.

For the Corona treatment, we recommend using the board within 12 months of the production date; after this period, the treatment level should be tested before printing.