


## Bleached tray board for conventional and microwave ovens

Trayforma is a bleached virgin-fibre board with a three layer fibre construction and with CTMP (chemi-thermomechanical pulp) in the middle layer and a white or black PET coating on the reverse side.

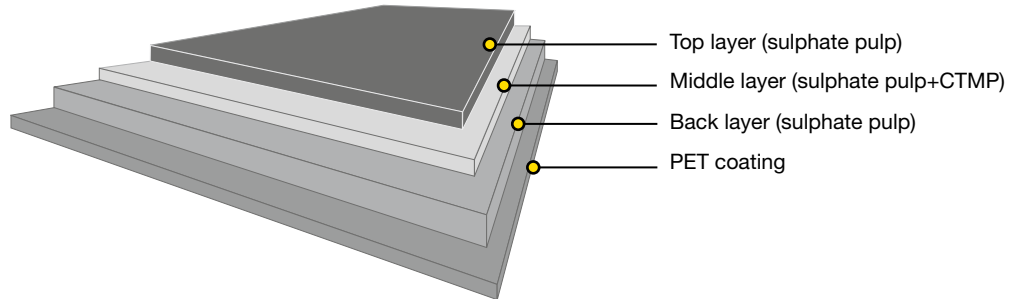

Issued: 03.2020  
Cancels: 08.2019

### Technical specification

Property/Unit	Tolerance	190 <sup>+40</sup>	230 <sup>+40</sup>	310 <sup>+40</sup>	350 <sup>+40</sup>	390 <sup>+40</sup>	Standard
<b>PET coated board:</b>							
Grammage, g/m <sup>2</sup>	± 7 %	230	270	350	390	430	ISO 536
PET reverse, g/m <sup>2</sup>	± 4	40	40	40	40	40	Mill method
Thickness, µm	± 7 %	270	320	435	480	565	ISO 534
<b>Baseboard:</b>							
Grammage, g/m <sup>2</sup>	± 6 %	190	230	310	350	390	ISO 536
Thickness, µm	± 6 %	255	305	420	465	550	ISO 534
Bending resistance L&W 15° MD, mN	min -25%	100	160	420	550	800	ISO 2493-1
Bending resistance L&W 15° CD, mN	min -25%	40	60	160	200	300	
Bending moment Taber 15° MD, mNm	min -25%	4.8	7.7	20.2	26.4	38.4	
Bending moment Taber 15° CD, mNm	min -25%	1.9	2.9	7.7	9.6	14.4	
Moisture, %	min 7.5%	9.5	9.5	9.5	9.5	9.5	ISO 287
Brightness D65/10, %, top		83	83	83	83	83	ISO 2470-2
Surface Smoothness, Bendtsen, ml/min, top	max 600	250	250	300	320	450	ISO 8791-2
Surface Smoothness, Bendtsen, ml/min, reverse	max 1300	400	500	700	800	1000	
Stretch CD, %		6.0	6.0	6.0	6.0	6.0	ISO 1924-3

OBA free



# Trayforma™ PET

## Bleached tray board for conventional and microwave ovens

### Certificates

- Quality management ISO 9001
- Environmental management ISO 14001
- Product safety FSC 22000
- Product safety ISO 22000
- Health and safety OHSAS 18001
- Energy management ISO 50001



FSC and PEFC certified board available upon request.



Paperboard is recyclable

### Key characteristics and main enduses

Trayforma is an eco-friendly high-quality board specially designed for pressed and folded trays, which have high requirements for formability. Trayforma is food-safe, ecological as a renewable material, and works exceptionally well in tray pressing.

With high heat-resistant PET coating, trays made of Trayforma PET can be used for heating or warming up prepared and semi-prepared foods. The white or black PET coating also provides protection against humidity, grease, and oxygen. Trayforma delivers excellent results in flexographic and offset printing to showcase brands. It's easy convertability and stability offers many opportunities for shelf differentiation.

### Printing and finishing techniques

The product can be used for flexo and offset printing. It is important to ensure that also the ink and varnish to be used are suitable for high temperatures in the oven use. It is important to check possible limitations of the printing and converting equipment and ensure that the basis weight of the board fits the tooling to be used.

### Storage recommendations

For optimal printing results, the moisture proof wrapping should not be removed until the board has reached the temperature of the press room.

Pallet/Reel Weight (kg)	Difference in temperature between board and press room (press room temp. approx. 20°C)		
	10°C	20°C	30°C
400 kg	2 days	2 days	3 days
800 kg	2 days	3 days	4 days
1200 kg	2 days	4 days	5 days

The product properties, according to the specifications, are guaranteed for 12 months after the production date. In order to ensure product safety, the product must be well wrapped and stored indoors, sheltered from rain and snow. The recommended storage conditions are 50-55% relative humidity and 20-23°C.

