


Bleached liquid packaging board

Natura Barr is a bleached liquid packaging board with a three-layer fibre construction, with two outer layers made of bleached sulphate pulp and a middle layer made of CTMP (chemi-thermo-mechanical pulp). It has a PE coating on the top side and a multilayer high-barrier coating on the reverse side.

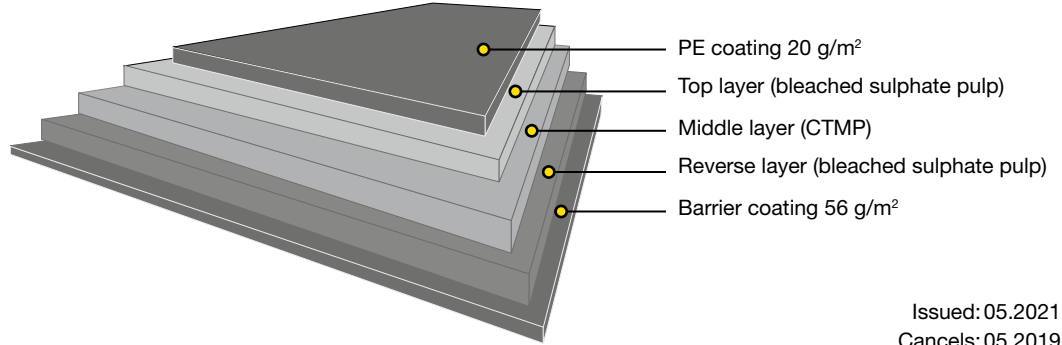

Issued: 05.2021
Cancels: 05.2019

Technical specification from Imatra BM4; New Natura Barr EB56 (PE581)

Property / Unit	20+233+42EB56	20+257+42EB56	20+273+42EB56	20+350+42EB56	Standards
Polymer coated board:					
Grammage, g/m ²	309	333	349	426	ISO 536
PE Topside, g/m ²	20	20	20	20	Mill method
Barrier Reverse, g/m ²	56	56	56	56	
Thickness, µm	470	520	532	631	ISO 534
Baseboard:					
Grammage, g/m ²	233	257	273	350	ISO 536
Thickness, µm	402	450	465	570	ISO 534
Density, kg/m ³	580	571	587	614	
Bending resistance (L&W 15°) MD, mN	415	580	635	1080	ISO 2493
Bending resistance (L&W 15°) CD, mN	162	223	242	410	
Bending resistance (L&W 15°) GM, mN	260	360	392	665	
Bending moment (Taber 15°) MD, mNm	20.0	28.0	30.7	52.2	
Bending moment (Taber 15°) CD, mNm	7.8	10.8	11.7	19.8	
Bending moment (Taber 15°) GM, mNm	12.6	17.4	18.9	32.1	
Moisture, %	6.2	6.2	6.2	6.5	ISO 287
Brightness (D65/10°), %, Top	79	79	79	79	ISO 2470
Roughness (Bendtsen), ml/min, Top	350	350	350	400	ISO 8791-2
Packaging size suggestion, ml	<500	1000	1000	2000	


Bleached liquid packaging board

Certificates

- Quality management ISO 9001
- Environmental management ISO 14001
- Product safety FSSC 22000
- Occupational health and safety ISO 45001
- Energy management ISO 50001



FSC and PEFC certified board available upon request.



Paperboard is recyclable

Key characteristics and main enduses

Natura Barr offers the best in product protection, in printing, converting and filling performance, and in economy and sustainability. Like all Stora Enso liquid packaging board qualities, it has an exceptionally high standard of odour and taint neutrality, which makes it especially suitable for packaging sensitive food products and keeping them fresh and hygienic, unchanged and untainted for their entire lifetime. The product range serves a wide array of packaging applications: milk, juice, soups, spices, water and yoghurt, as well as various high-volume non-food products, such as liquid detergents and fabric softeners.

Storage recommendations

For optimal printing results, the moisture proof wrapping should not be removed until the board has reached the temperature of the press room.

Pallet/Reel Weight (kg)	Difference in temperature between board and press room (press room temp, approx 20°C)		
	10°C	20°C	30°C
400 kg	2 days	2 days	3 days
800 kg	2 days	3 days	4 days
1200 kg	2 days	4 days	5 days

The product properties, according to the specifications, are guaranteed for 12 months after the production date. In order to ensure product safety, the product must be well wrapped and stored indoors, sheltered from rain and snow. The recommended storage conditions are 50-55% relative humidity and 20-23°C.

For the Corona treatment, we recommend using the board within 12 months of the production date; after this period, the treatment level should be tested before printing.